

AquaMax Eco Premium

CORE 6
TECHNOLOGY

NEXT LEVEL EFFICIENCY


ECO


OASE
CONTROL


VOICE
CONTROL

5
YEARS*
GUARANTEE
3+2


- **More efficient:** Improved efficiency on all six AquaMax Eco Premium 5000–21000 models
- **More economical:** Lower power consumption all year round thanks to the increased energy efficiency of the motors
- **Quieter:** Garden water features are more peaceful thanks to AquaMax Eco Premium pumps that are quieter than ever before
- **Fast switch-off:** Reliable protection against blockages and dry running thanks to the built-in OASE Environmental Function Control
- **Smart:** OASE Control interface for digital monitoring and control of the pump. A Garden Controller Cloud or InScenio FM-Master Cloud and other accessories (adapters, cables) are required to use the OASE Control functions
- **Demand-driven:** Seasonal Flow Control – now available on all models – increases efficiency by adjusting flow rates based on temperature
- **Suitable for cold weather:** Frost-proof down to -20°C
- **Compatible with the app:** Simply download the OASE Control app (from the App Store or Play Store) and off you go
- **Versatile:** You can place this pump in dry conditions or submerge it in water
- **Dirt be gone:** Reliable removal of plant debris or fish waste up to a size of 11 mm
- **»Made in Germany«:** Precise and reliable engineering skills at a particularly high level of quality

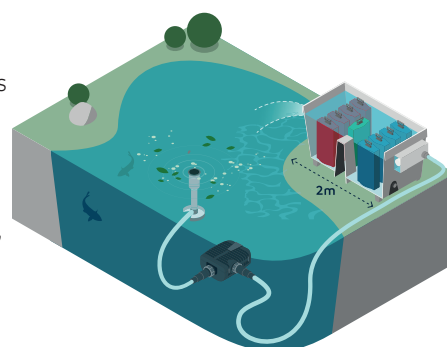

Dry installation

The AquaMax Eco Premium is also designed for dry installation (e.g. in a pump chamber).



SFC switch: Available on AquaMax Eco Premium 5000–21000. When the SFC function is switched on, the pump automatically optimises the water flow and delivery head, reducing them by up to 50%.

EXTRAS

USAGE IN THE SWIMMING POND

The AquaMax Eco Premium is also available as a 12 V version for safe use in swimming ponds and bathing ponds.

6000/12 V
12000/12 V

Item no. 50730
Item no. 50382

PRODUCT	AQUAMAX ECO PREMIUM 5000	AQUAMAX ECO PREMIUM 7000	AQUAMAX ECO PREMIUM 9000	AQUAMAX ECO PREMIUM 13000	AQUAMAX ECO PREMIUM 17000	AQUAMAX ECO PREMIUM 21000
Dimensions (L x W x H)	340 x 275 x 160 mm					
Rated voltage	220–240 V / 50/60 Hz					
Power consumption	10–35 W	12–45 W	14–60 W	16–100 W	18–140 W	20–180 W
Guarantee (+ request guarantee)* p. 129	3 + 2 years					
Max. flow rate (litres per hour)	5000 l/h	7000 l/h	9000 l/h	13,000 l/h	17,000 l/h	21,000 l/h
Max. head height, metres	3.50 m	4.00 m	4.50 m	5.00 m	5.50 m	6.00 m
Hose connection	25/32/38 mm (1", 1 ¼", 1 ½")		25/32/38/50 mm (1", 1 ¼", 1 ½", 2")			
Filter intake surface	1000 cm²					
Max. coarse debris displacement	11 mm					
Setup type	For submerged or dry installation					
Electronic adjustment	Yes					
OASE Control connection	Yes					
Item no. (GB Version)	75928	85488	75929	75932	75933	75934
Item no.	75923	85487	75924	75925	75926	75927