

Aquarius Universal Premium

Power house for large decorative fountains



HIGH SUCTION

The pump conveys the water even when the water level is low



FLOW RATE

Mechanically regulate the water flow rate quickly and easily



SUSTAINABLE

Low power consumption



VERY QUIET

Nothing but the sound of water splashing thanks to the extreme smoothness of operation



WELL-PROTECTED

Integrated thermal protection





STABLE

Removable stand, for mounting even in confined spaces

ACCESSORIES

Product		Item no.	Item no. (GB-Version)
Schaumspudler 35 - 10 E	> Page 263	50984	-
Vulcan 37 - 2.5 K	> Page 262	52319	-
Telescopic nozzle extension TE 10 K	> Page 264	52270	-
LunaLed 6s	> Page 310	50114	75074
LunaLed 9s	> Page 310	50115	75075
InScenio 230	> Page 290	55433	not available in GB!
InScenio FM-Master 3	> Page 290	36311	56473
Pumpshield	> Page 147	34876	-
AquaActiv PumpClean 500 ml	> Page 370	40242	75806

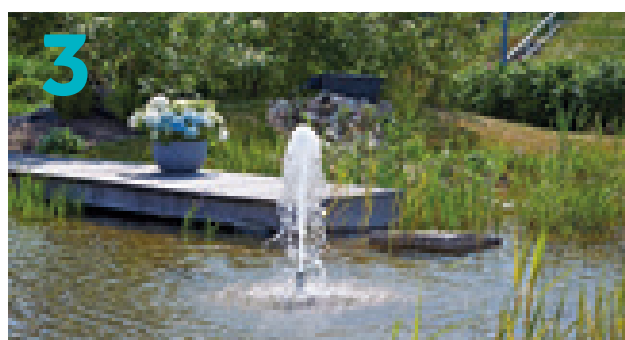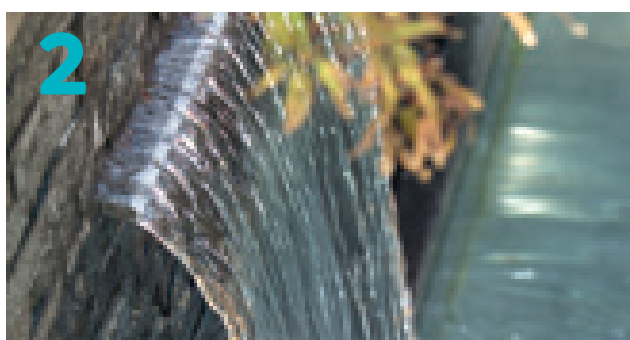

1. Winter-proof

This pump is damage-resistant down to temperatures as low as -20°C.

2. Examples of use

Aquarius Universal are ideal for operating modern waterfalls.

3. Fountain attachments

For harmonious water patterns.

TECHNICAL DATA

Product		Aquarius Universal Premium Eco 3000	Aquarius Universal Premium Eco 4000	Aquarius Universal Premium 4000	Aquarius Universal Premium 5000	Aquarius Universal Premium 6000	Aquarius Universal Premium 9000	Aquarius Universal Premium 12000
Dimensions (L x W x H)	mm	245 x 130 x 135		315 x 140 x 130			340 x 160 x 160	
Rated voltage		220 - 240 V / 50 Hz						
Power consumption	W	40	50	65	85	110	195	270
Power cable length	m	10.00						
Net weight	kg	3.00		3.40		3.50	5.40	5.45
Guarantee (+ request guarantee) `	Years	3 + 2						
Max. flow rate	l/min	50	66		83	100	150	200
Max. flow rate	l/h	3000	4000		5000	6000	9000	12000
Max. head height, metres	m	3.20	3.40		4.50	5.00	6.00	7.00
Pressure-side connection		G 1						G 1 ½
Suction-side connection		G 1 ½						
Hose connection	mm	19 / 25 / 32 / 38						25 / 32 / 38
Hose connection		¾", 1", 1 ¼", 1 ½"						1", 1 ¼", 1 ½"
Filter intake surface	cm²	200						220
Electronic adjustment		No			Yes			
Number of nozzles	Units	-						
Telescopic nozzle extension	cm	-						
Setup type		Can be set up underwater & dry installed						
Item no. (GB-Version)		-			56619	-		
Item no.		57390	57392	56614	56617	56637	56876	56879

*Guarantee valid under the guarantee conditions from OASE. Can be viewed at www.oase.com/guarantee
Pump performance curve overview of pond pumps (> see page 148)

